

TECHNICAL DATA SHEET

Inductive Proximity Switches Cylindrical Proximity Sensors **High Pressure Series**

Contents

- Functional Description
- Application Scenarios
- Technical Parameters
- Size Parameters
- Wiring Diagram



Proximity sensors: solutions for multiple scenarios

Proximity sensors are widely used in many fields due to their non-contact detection, high accuracy and fast response.

Inductive series for oil-resistant and corrosion-resistant machine tool industry

Many times we are faced with harsh operating environments, compact installation spaces, and conditions with both movement and corrosion during use, such as the machine tool manufacturing industry, which has such diverse needs – the number of materials, processes and molds involved is huge and varied. During the production process, cutting fluids and abrasives are required to process workpieces, so various sensor solutions that are not affected by harsh environmental conditions are required. dadisick's product series, which uses different manufacturing processes, can even provide fully suitable sensor solutions for high-speed applications or applications involving corrosive coolants and lubricants.



All-metal integrated housing anti-washing series



Due to the stainless steel integrated housing, this series of sensors not only has good impact resistance, but also can withstand the corrosion of detergents and solvents. It can be used in environments that require frequent high-pressure washing, and can achieve long-term sealing that meets the IP69K protection level. At the same time, it is compatible with the installation method of conventional sensors, which can be replaced and replaced conveniently and practically. It includes a variety of models with a diameter of 8mm...30mm, all with direct cable output and M12 standard connector. Operating distance 2...8mm.

Low-temperature -40°C inductive series for wind power generation

Wind power generation has become one of the world's recognized main clean energy generation methods because it does not require the use of fuel and does not produce radiation or air pollution. Different sensors are used in the operation of the variable pitch yaw generator reducer of the wind turbine to detect the correction of the control movement and rotation process. Most of the installation locations of wind turbines are in places with severe temperature changes such as mountains, oceans and plateaus, which require higher temperature environments for sensors. Our low-temperature -40°C product series launched for this use environment is perfectly adapted to the application here.



Solutions for high-temperature series long-distance products in steelmaking and rolling



Steelmaking and rolling equipment produces complex oil, gas and water erosion and flushing sensors for various raw materials under high temperature of oil and gas in a high-temperature 2000° radiation environment, which puts higher requirements on the stability of sensors. In the position control detection of multiple processes of steel billets, coils and wires, DADISICK has a variety of series of products with high temperature resistance of 250°C, DC two-wire, AC 250V, etc., which are widely used in this complex environment to ensure normal production.

Anti-welding slag adhesion, high temperature resistance and anti-interference series

Whether it is stamping, welding, painting, or assembly processes in automobile manufacturing, long distance, anti-welding slag adhesion, strong current magnetic field interference, or high temperature environment, DADISICK sensors can be used for fixtures, molds and other equipment. Reliable performance and perfect solutions bring a smooth production process to automobile manufacturing. In the welding of various high-current welding machines, the strong magnetic field interference generated by the current and the high-temperature heat conduction generated by the arc will affect the sensors in the fixture molds. Reliable performance products must be selected to ensure normal operation.



All-metal integrated housing anti-washing series

A large number of intelligent warehousing and logistics facilities, such as AGV trolleys and rail-to-rail stackers, are equipped with our sensors to realize the control of rotating positioning and lifting devices, etc., providing very stable and durable high-reliability products. Under the high requirements of small installation space and long detection distance, this series of products is the best choice for customers with strict cost control. Choosing this series of products is the best choice for customers with strict cost control.



High-pressure 1000Bar hydraulic cylinder series

The stable and reliable hydraulic cylinder telescopic more often uses DADISICK's inductive proximity sensors with a high pressure resistance of up to 1000Bar to achieve the control of the origin. Ceramic chips are used as high-voltage products at the induction level and stainless steel integrated housings are used to achieve high-pressure resistant applications. DC10-30V two-wire and three-wire products are also provided.



Analog output series for position correction and control devices



In detecting the offset position of the controlled parts of the fixture, analog output proximity sensors are often used in wire reel correction, and the size of the offset is controlled by the size of the detection distance. This use can be installed and tested in a very small position space. We have successfully provided stable and accurate products for many parts manufacturers and wire rope winding equipment, including 0-10V voltage output and 4-20mA current output and current + voltage output products. The detectable distance can be adjusted between 0-50mm.


Shoemaking, textile and papermaking machinery series products

Whichever manufacturer of shoemaking machines, textile machines and papermaking machines has long equipped the mechanical equipment they produce with more automated operation technologies, these control technologies are also equipped with high-quality sensors to achieve their control conditions. They require products with higher switching frequency accuracy and better stability, and they need a variety of products with unconventional dimensions. We tailor new outer shell dimensions for them one by one to meet their needs.



Proximity Sensor Model Specifications

L	P	0	8	0	1	N	O	Z	A	A	3	A	S		(LP08-01NO-ZAA-3A-S)
															Special Instructions Shell material: H: nickel-plated brass; S: stainless steel; L: aluminum alloy; P: PBT; T: Teflon; F: PTFE; M: POM; Short circuit protection: A: Standard type with short circuit protection M: Short type with short circuit protection S: Standard type without short circuit protection R: Ultra short type with short circuit protection Wiring method: 2: 2-wire 5: 5-wire type 2E: 2 wire+M8 connector 2T: 2 wire+M12 connector 3: 3-wire E: M8 connector 3E: 3 wire+M8 connector 3T: 3 wire+M12 connector 4: 4-wire T: M12 connector 4E: 4 wire+M8 connector 4T: 4 wire+M12 connector Voltage: A:DC10-30V B:DC5-36V C:DC10-55V D:DC10-60V E:DC18-30V F:DC6-12V G:AC20-250V H:AC/DC20-250V Installation method: A: Shielded B: Non-shielded Connection method: Y: Plug-in type Z: Cable type Output mode: NC: NPN NC; NO: NPN NO PC: PNP NC; PO: PNP NO NS: NPN NO&NC; PS: PNP NO&NC HC: DC NC; HO: DC NO AC: AC NC; AO: AC NO HS: DC NO&NC; AS: AC NO&NC I: analog current; U: analog voltage TC: AC&DC NC; TO: AC&DC NO TS: AC/DC NO&NC; V: Current + voltage output NA: Explosion-proof type Detection distance: 1mm-50mm Specification(mm): ϕ 3, ϕ 4, M4, M5, ϕ 6.5, M8, M12, M18, M30 Type: R: Standard type; X: Ultra-small; B: Explosion-proof type; J: All-metal type; P: High-pressure resistant type; G: High-temperature resistant; Z: Low-temperature resistant type; C: Limit switch type; D: Anti-welding slag and high-magnetic type; F: Corrosion-resistant type; A: Analog type; I: Ring type; E: Square type Series: L: Inductive sensor C: Capacitive sensor

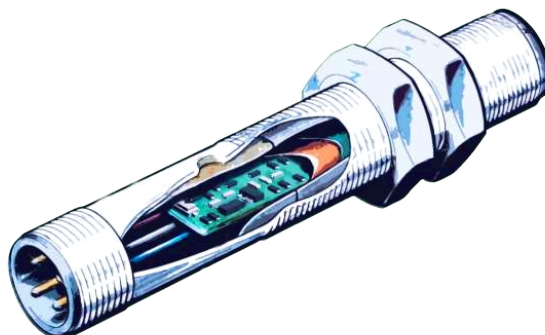

High Pressure Series

Proximity sensors



This series features special designed for high pressure ambient application like pressure pump, oil cylinder etc.

Features:

- Applicable pressure: 500/1000Bar
- Specifications: M5, M8, M12, M14, M18
- Detection distance: 0.8-3mm
- Switching frequency: 2KHZ
- Product certification: CE, ROHS





Application Industry

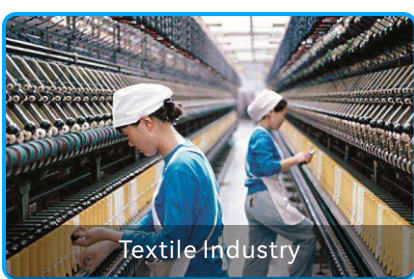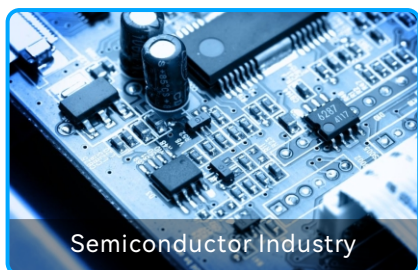

Product Parameters



High Pressure Series



Size category	M5	M8
● Shielded ○ Non-shielded	●	●
Sn: mm	0.8 mm	1 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC	10-30VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	M12 Connector	2m oil-proof TPU cable 2.8 φ 3x0.15
Product Model		
DC 3 line 10-30V NPN NO	LP05-0.8NO-YAA-EA-S	LP08-01NO-ZAA-3A-S
DC 3 line 10-30V NPN NC	LP05-0.8NC-YAA-EA-S	LP08-01NC-ZAA-3A-S
DC 3 line 10-30V PNP NO	LP05-0.8PO-YAA-EA-S	LP08-01PO-ZAA-3A-S
DC 3 line 10-30V PNP NC	LP05-0.8PC-YAA-EA-S	LP08-01PC-ZAA-3A-S
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO		
DC 2 line 10-60V NC		
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	1.5 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	2m oil-proof TPU cable 2.9 φ 3x0.15	2m oil-proof TPU cable 2.9 φ 3x0.15
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-ZAA-3A-S43	LP12-1.5NO-ZAA-3A-S47
DC 3 line 10-30V NPN NC	LP12-1.5NC-ZAA-3A-S43	LP12-1.5NC-ZAA-3A-S47
DC 3 line 10-30V PNP NO	LP12-1.5PO-ZAA-3A-S43	LP12-1.5PO-ZAA-3A-S47
DC 3 line 10-30V PNP NC	LP12-1.5PC-ZAA-3A-S43	LP12-1.5PC-ZAA-3A-S47
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-ZAD-2A-S43	LP12-1.5HO-ZAD-2A-S47
DC 2 line 10-60V NC	LP12-1.5HC-ZAD-2A-S43	LP12-1.5HC-ZAD-2A-S47
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	1.5 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	2m oil-proof TPU cable 2.9 φ 3x0.15	2m oil-proof TPU cable 2.9 φ 3x0.15
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-ZAA-3A-S50	LP12-1.5NO-ZAA-3A-S56
DC 3 line 10-30V NPN NC	LP12-1.5NC-ZAA-3A-S50	LP12-1.5NC-ZAA-3A-S56
DC 3 line 10-30V PNP NO	LP12-1.5PO-ZAA-3A-S50	LP12-1.5PO-ZAA-3A-S56
DC 3 line 10-30V PNP NC	LP12-1.5PC-ZAA-3A-S50	LP12-1.5PC-ZAA-3A-S56
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-ZAD-2A-S50	LP12-1.5HO-ZAD-2A-S56
DC 2 line 10-60V NC	LP12-1.5HC-ZAD-2A-S50	LP12-1.5HC-ZAD-2A-S56
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	1.5 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	M12 Connector	2m oil-proof TPU cable 2.9φ 3x0.15
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-YAA-TA-S56	LP12-1.5NO-ZAA-3A-S78
DC 3 line 10-30V NPN NC	LP12-1.5NC-YAA-TA-S56	LP12-1.5NC-ZAA-3A-S78
DC 3 line 10-30V PNP NO	LP12-1.5PO-YAA-TA-S56	LP12-1.5PO-ZAA-3A-S78
DC 3 line 10-30V PNP NC	LP12-1.5PC-YAA-TA-S56	LP12-1.5PC-ZAA-3A-S78
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-YAD-TA-S56	LP12-1.5HO-ZAD-2A-S78
DC 2 line 10-60V NC	LP12-1.5HC-YAD-TA-S56	LP12-1.5HC-ZAD-2A-S78
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	1.5 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	M12 Connector	M12 Connector
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-YAA-TA-S78	LP12-1.5NO-YAA-TA-S94
DC 3 line 10-30V NPN NC	LP12-1.5NC-YAA-TA-S78	LP12-1.5NC-YAA-TA-S94
DC 3 line 10-30V PNP NO	LP12-1.5PO-YAA-TA-S78	LP12-1.5PO-YAA-TA-S94
DC 3 line 10-30V PNP NC	LP12-1.5PC-YAA-TA-S78	LP12-1.5PC-YAA-TA-S94
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-YAD-TA-S78	LP12-1.5HO-YAD-TA-S94
DC 2 line 10-60V NC	LP12-1.5HC-YAD-TA-S78	LP12-1.5HC-YAD-TA-S94
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	2 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	M12 Connector	2m oil-proof TPU cable 2.9φ 3x0.15
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-YAA-TA-S138	LP12-02NO-ZAA-3A-S43
DC 3 line 10-30V NPN NC	LP12-1.5NC-YAA-TA-S138	LP12-02NC-ZAA-3A-S43
DC 3 line 10-30V PNP NO	LP12-1.5PO-YAA-TA-S138	LP12-02PO-ZAA-3A-S43
DC 3 line 10-30V PNP NC	LP12-1.5PC-YAA-TA-S138	LP12-02PC-ZAA-3A-S43
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-YAD-TA-S138	LP12-02HO-ZAD-2A-S43
DC 2 line 10-60V NC	LP12-1.5HC-YAD-TA-S138	LP12-02HC-ZAD-2A-S43
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	2 mm	2 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	2m oil-proof TPU cable 2.9 φ 3x0.15	2m oil-proof TPU cable 2.9 φ 3x0.15
Product Model		
DC 3 line 10-30V NPN NO	LP12-02NO-ZAA-3A-S47	LP12-02NO-ZAA-3A-S50
DC 3 line 10-30V NPN NC	LP12-02NC-ZAA-3A-S47	LP12-02NC-ZAA-3A-S50
DC 3 line 10-30V PNP NO	LP12-02PO-ZAA-3A-S47	LP12-02PO-ZAA-3A-S50
DC 3 line 10-30V PNP NC	LP12-02PC-ZAA-3A-S47	LP12-02PC-ZAA-3A-S50
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-02HO-ZAD-2A-S47	LP12-02HO-ZAD-2A-S50
DC 2 line 10-60V NC	LP12-02HC-ZAD-2A-S47	LP12-02HC-ZAD-2A-S50
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	2 mm	2 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	2m oil-proof TPU cable 2.9 φ 3x0.15	M12 Connector
Product Model		
DC 3 line 10-30V NPN NO	LP12-02NO-ZAA-3A-S56	LP12-02NO-YAA-TA-S56
DC 3 line 10-30V NPN NC	LP12-02NC-ZAA-3A-S56	LP12-02NC-YAA-TA-S56
DC 3 line 10-30V PNP NO	LP12-02PO-ZAA-3A-S56	LP12-02PO-YAA-TA-S56
DC 3 line 10-30V PNP NC	LP12-02PC-ZAA-3A-S56	LP12-02PC-YAA-TA-S56
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-02HO-ZAD-2A-S56	LP12-02HO-YAD-TA-S56
DC 2 line 10-60V NC	LP12-02HC-ZAD-2A-S56	LP12-02HC-YAD-TA-S56
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	2 mm	2 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	2m oil-proof TPU cable 2.9 φ 3x0.15	M12 Connector
Product Model		
DC 3 line 10-30V NPN NO	LP12-02NO-ZAA-3A-S78	LP12-02NO-YAA-TA-S78
DC 3 line 10-30V NPN NC	LP12-02NC-ZAA-3A-S78	LP12-02NC-YAA-TA-S78
DC 3 line 10-30V PNP NO	LP12-02PO-ZAA-3A-S78	LP12-02PO-YAA-TA-S78
DC 3 line 10-30V PNP NC	LP12-02PC-ZAA-3A-S78	LP12-02PC-YAA-TA-S78
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-02HO-ZAD-2A-S78	LP12-02HO-YAD-TA-S78
DC 2 line 10-60V NC	LP12-02HC-ZAD-2A-S78	LP12-02HC-YAD-TA-S78
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	2 mm	2 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	M12 Connector	M12 Connector
Product Model		
DC 3 line 10-30V NPN NO	LP12-02NO-YAA-TA-S94	LP12-02NO-YAA-TA-S138
DC 3 line 10-30V NPN NC	LP12-02NC-YAA-TA-S94	LP12-02NC-YAA-TA-S138
DC 3 line 10-30V PNP NO	LP12-02PO-YAA-TA-S94	LP12-02PO-YAA-TA-S138
DC 3 line 10-30V PNP NC	LP12-02PC-YAA-TA-S94	LP12-02PC-YAA-TA-S138
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-02HO-YAD-TA-S94	LP12-02HO-YAD-TA-S138
DC 2 line 10-60V NC	LP12-02HC-YAD-TA-S94	LP12-02HC-YAD-TA-S138
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	1.5 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	○	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Ceramics	Ceramics
Connection method	M12 Connector	M12 Connector
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-YAA-TA-S55	LP12-1.5NO-YAA-TA-S69
DC 3 line 10-30V NPN NC	LP12-1.5NC-YAA-TA-S55	LP12-1.5NC-YAA-TA-S69
DC 3 line 10-30V PNP NO	LP12-1.5PO-YAA-TA-S55	LP12-1.5PO-YAA-TA-S69
DC 3 line 10-30V PNP NC	LP12-1.5PC-YAA-TA-S55	LP12-1.5PC-YAA-TA-S69
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-YAD-TA-S55	LP12-1.5HO-YAD-TA-S69
DC 2 line 10-60V NC	LP12-1.5HC-YAD-TA-S55	LP12-1.5HC-YAD-TA-S69
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters





High Pressure Series



Size category	M12	M12
● Shielded ○ Non-shielded	●	●
Sn: mm	1.5 mm	1.5 mm
Shell material	Stainless steel	Stainless steel
● LED display ○ No LED display	●	●
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC
Allowable pulsating voltage	<10%	<10%
No-load current	<10mA	<10mA
Maximum load current	200mA	200mA
Leakage current	<0.01mA	<0.01mA
Voltage drop	<1.5V	<1.5V
Switching frequency	1KHZ	1KHZ
Pressure	500Bar/7250PSI	500Bar/7250PSI
Switching hysteresis	<15%(Sr)	<15%(Sr)
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)
Protection level	IP67, IP69K	IP67, IP69K
Operating temperature	-25°C - +70°C	-25°C - +70°C
Temperature drift	<10%(Sr)	<10%(Sr)
Short circuit protection/reverse polarity protection	Yes	Yes
Overload protection current	220mA	220mA
Sensing surface material	Stainless steel	Stainless steel
Connection method	M12 Connector	M12 Connector
Product Model		
DC 3 line 10-30V NPN NO	LP12-1.5NO-YAA-TA-S78	LP12-1.5NO-YAA-TA-S94
DC 3 line 10-30V NPN NC	LP12-1.5NC-YAA-TA-S78	LP12-1.5NC-YAA-TA-S94
DC 3 line 10-30V PNP NO	LP12-1.5PO-YAA-TA-S78	LP12-1.5PO-YAA-TA-S94
DC 3 line 10-30V PNP NC	LP12-1.5PC-YAA-TA-S78	LP12-1.5PC-YAA-TA-S94
DC 4 line 10-30V Convertible PNP (NO&NC)		
DC 4 line 10-30V Convertible NPN (NO&NC)		
DC 2 line 10-60V NO	LP12-1.5HO-YAD-TA-S78	LP12-1.5HO-YAD-TA-S94
DC 2 line 10-60V NC	LP12-1.5HC-YAD-TA-S78	LP12-1.5HC-YAD-TA-S94
DC 3 line 10-55V NPN NO		
DC 3 line 10-55V NPN NC		
DC 3 line 10-55V PNP NO		
DC 3 line 10-55V PNP NC		
DC 3 line 5-36V NPN NO		
DC 3 line 5-36V NPN NC		
DC 3 line 5-36V PNP NO		
DC 3 line 5-36V PNP NC		
DC 4 line 5-36V Convertible PNP (NO&NC)		
DC 4 line 5-36V Convertible NPN (NO&NC)		

Product Parameters



High Pressure Series

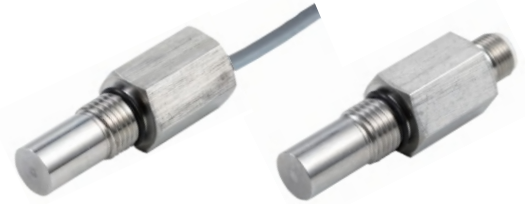

Size category	M12	M14	M14
● Shielded ○ Non-shielded	●		
Sn: mm	2 mm	3 mm	3 mm
Shell material	Stainless steel	Stainless steel	
● LED display ○ No LED display	○	●	○
Operating voltage	10-30VDC/10-60VDC	10-30VDC/10-60VDC	
Allowable pulsating voltage	<10%	<10%	
No-load current	<10mA	<10mA	
Maximum load current	200mA	200mA	
Leakage current	<0.01mA	<0.01mA	
Voltage drop	<1.5V	<1.5V	
Switching frequency	1KHZ	1KHZ	
Pressure	500Bar/7250PSI	500Bar/7250PSI	
Switching hysteresis	<15%(Sr)	<15%(Sr)	
Repeat accuracy	<1.0%(Sr)	<1.0%(Sr)	
Protection level	IP67, IP69K	IP67, IP69K	
Operating temperature	-25°C - +70°C	-25°C - +70°C	
Temperature drift	<10%(Sr)	<10%(Sr)	
Short circuit protection/reverse polarity protection	Yes	Yes	
Overload protection current	220mA	220mA	
Sensing surface material	Stainless steel	Ceramics	
Connection method	M12 Connector	2m oil-proof PVC cable 4 φ 3x0.15	M12 Connector
Product Model			
DC 3 line 10-30V NPN NO	LP12-02NO-YAA-TA-S	LP14-03NO-ZAA-3A-S	LP14-03NO-YAA-TA-S
DC 3 line 10-30V NPN NC	LP12-02NC-YAA-TA-S	LP14-03NC-ZAA-3A-S	LP14-03NC-YAA-TA-S
DC 3 line 10-30V PNP NO	LP12-02PO-YAA-TA-S	LP14-03PO-ZAA-3A-S	LP14-03PO-YAA-TA-S
DC 3 line 10-30V PNP NC	LP12-02PC-YAA-TA-S	LP14-03PC-ZAA-3A-S	LP14-03PC-YAA-TA-S
DC 4 line 10-30V Convertible PNP (NO&NC)			
DC 4 line 10-30V Convertible NPN (NO&NC)			
DC 2 line 10-60V NO	LP12-02HO-YAD-TA-S	LP14-03HO-ZAD-2A-S	LP14-03HO-YAD-TA-S
DC 2 line 10-60V NC	LP12-02HC-YAD-TA-S	LP14-03HC-ZAD-2A-S	LP14-03HC-YAD-TA-S
DC 3 line 10-55V NPN NO			
DC 3 line 10-55V NPN NC			
DC 3 line 10-55V PNP NO			
DC 3 line 10-55V PNP NC			
DC 3 line 5-36V NPN NO			
DC 3 line 5-36V NPN NC			
DC 3 line 5-36V PNP NO			
DC 3 line 5-36V PNP NC			
DC 4 line 5-36V Convertible PNP (NO&NC)			
DC 4 line 5-36V Convertible NPN (NO&NC)			

Product Parameters

High Pressure Series



Size category

M18

● Shielded ○ Non-shielded

●

Sn: mm

3 mm

Shell material

Stainless steel

● LED display ○ No LED display

●

Operating voltage

10-30VDC/10-60VDC

Allowable pulsating voltage

<10%

No-load current

<10mA

Maximum load current

200mA

Leakage current

<0.01mA

Voltage drop

<1.5V

Switching frequency

1KHZ

Pressure

500Bar/7250PSI

Switching hysteresis

<15%(Sr)

Repeat accuracy

<1.0%(Sr)

Protection level

IP67, IP69K

Operating temperature

-25°C - +70°C

Temperature drift

<10%(Sr)

Short circuit protection/reverse polarity protection

Yes

Overload protection current

220mA

Sensing surface material

Stainless steel

Connection method

M12 Connector

Product Model

DC 3 line 10-30V NPN NO LP18-03NO-YAA-TA-S70 LP18-03NO-YAA-TA-S79

DC 3 line 10-30V NPN NC LP18-03NC-YAA-TA-S70 LP18-03NC-YAA-TA-S79

DC 3 line 10-30V PNP NO LP18-03PO-YAA-TA-S70 LP18-03PO-YAA-TA-S79

DC 3 line 10-30V PNP NC LP18-03PC-YAA-TA-S70 LP18-03PC-YAA-TA-S79

DC 4 line 10-30V Convertible PNP (NO&NC)

DC 4 line 10-30V Convertible NPN (NO&NC)

DC 2 line 10-60V NO LP18-03HO-YAD-TA-S70 LP18-03HO-YAD-TA-S79

DC 2 line 10-60V NC LP18-03HC-YAD-TA-S70 LP18-03HC-YAD-TA-S79

DC 3 line 10-55V NPN NO

DC 3 line 10-55V NPN NC

DC 3 line 10-55V PNP NO

DC 3 line 10-55V PNP NC

DC 3 line 5-36V NPN NO

DC 3 line 5-36V NPN NC

DC 3 line 5-36V PNP NO


DC 3 line 5-36V PNP NC

DC 4 line 5-36V Convertible PNP (NO&NC)


DC 4 line 5-36V Convertible NPN (NO&NC)

Wiring Diagram


DC NPN NO

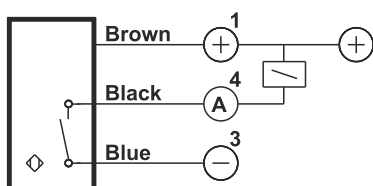


DC NPN NC

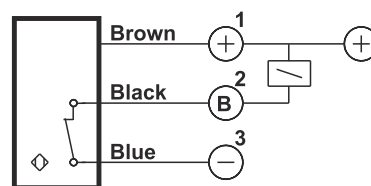


DC PNP NO

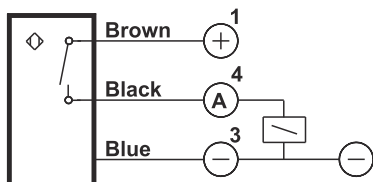


DC PNP NC

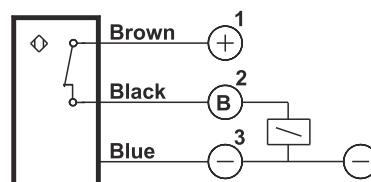


DC NPN NO&NC

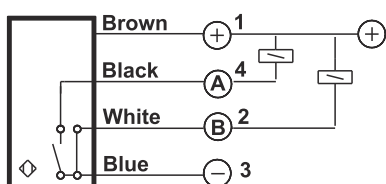


DC PNP NO&NC

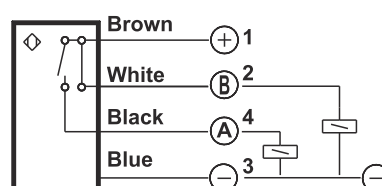

DC 2 wire NO

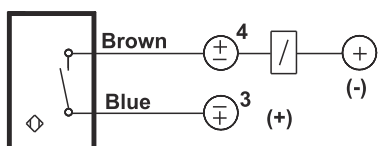


DC 2 wire NC

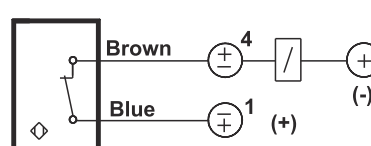


Plastic housing

AC/DC 20-250V
or AC 20-250V
TWO WIRE-NO

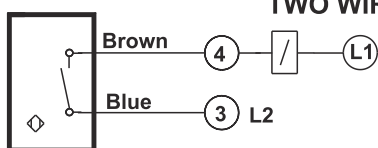


Plastic housing

AC/DC 20-250V
or AC 20-250V
TWO WIRE-NC

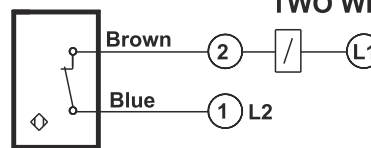


Metal housing

AC/DC 20-250V
or AC 20-250V
TWO WIRE-NO

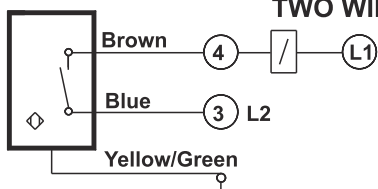


Metal housing

AC/DC 20-250V
or AC 20-250V
TWO WIRE-NC

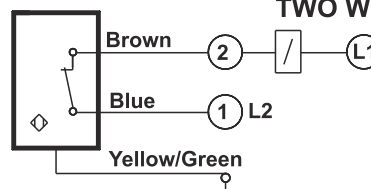


Wiring Diagram


Plastic housing AC 20-250V
NO,NC Changeable

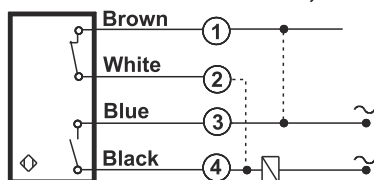


Metal housing AC 20-250V
NO,NC Changeable

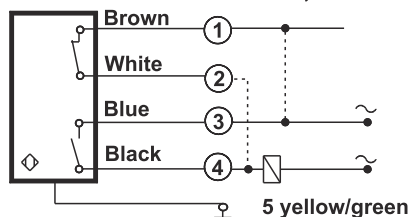


Plastic housing AC 20-250V
NO,NC Changeable

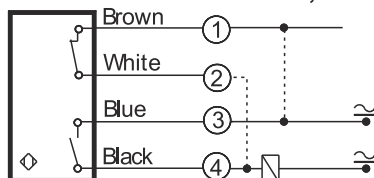


Metal housing AC 20-250V
NO,NC Changeable

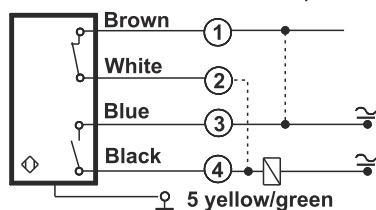


Analog (current + voltage output type)

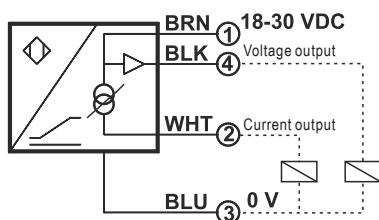


Analog (current output type)



Riot-proof DC 6-12V




Analog (voltage output type)

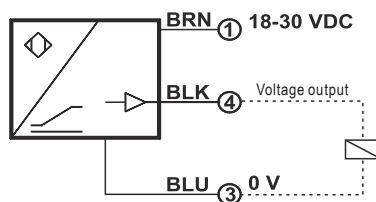


Connector Diagram


Used for M8 DC
M8

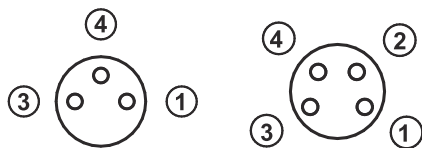

Used for M12 DC
M12



Used for M12 AC
M12



Used for M18 M30 DC or AC

